Resident Solar Rooftop Proposal

Ref.: -USE/2026-2027/1207 19-09-2026

To.

KURIYA MAHESH SHANTILAL

RAVI PARK STREET No 2,

VAVDI ROAD MORBI,

MORBI. - 363641

Subject: - Design, Supply, Engineering, Installation & Commissioning of Grid Tied Solar Power Generating System

We Thank You Very Much for Showing Interest in Our Grid Connected Solar System. We Are Pleased to Submit Our Most Competitive Offer For 3.60 kW Solar on Grid Rooftop System as Per Your Requirement. The Price Quoted You Hereunder Is For a Turn Key Project Including Installation & Commissioning of The System at Your Premises. Please Feel Free to Write / Speak to Us for Any Further Query or Any Clarification If Required.

We Look Forward to Hearing from You Shortly.

Thanking You,

From,


Unique Solar Energy

Mo. XXXXX XXXXX

Project Summary

Company / Customer Name	SANGANI JAGDISH VALLBHABHAI
Proposed Project Location	RAJKOT
City	Rajkot
State	Gujarat
New PV Capacity	3.60 **Existing Capacity:** - **Total PV Capacity:** 3.60

SCHEMATIC DIAGRAM FOR NET METERING FACILITY

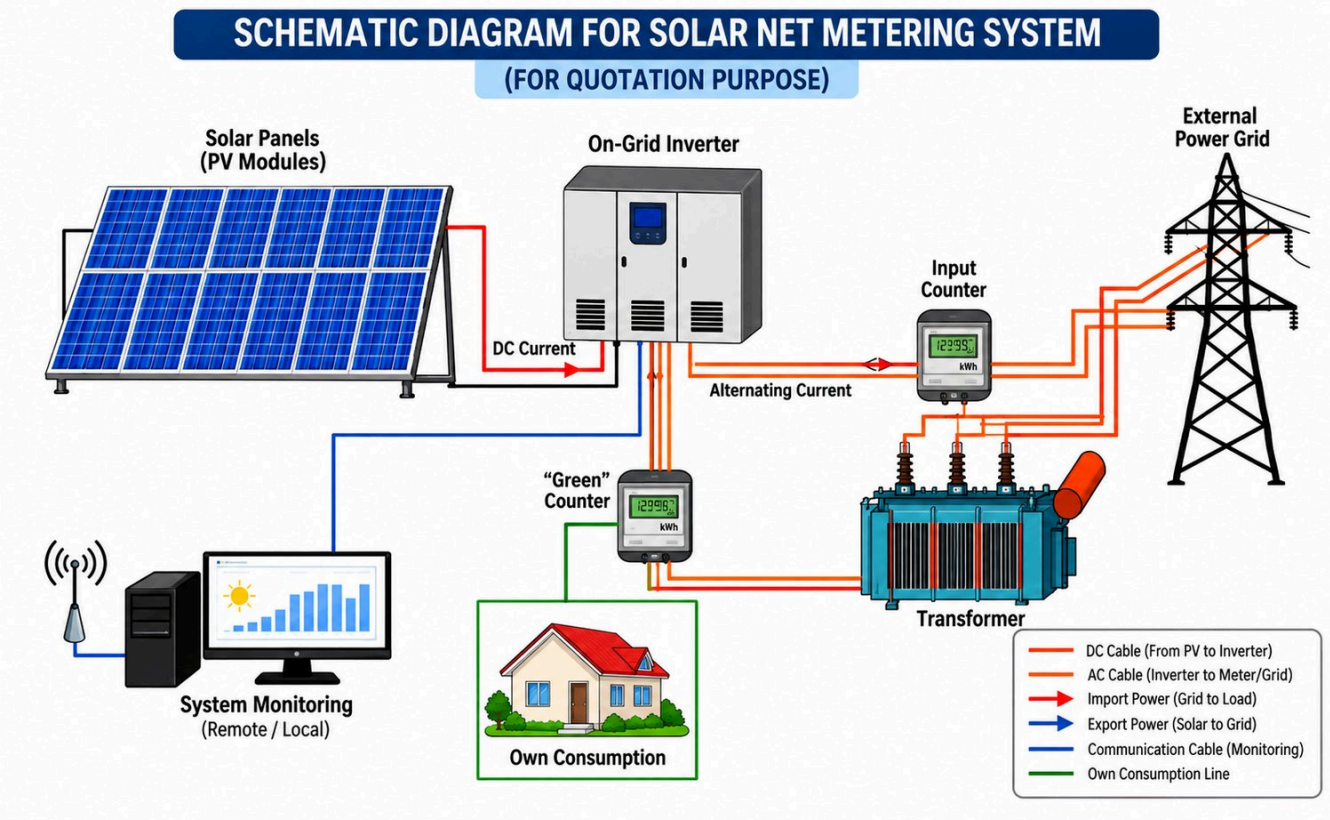

Commercial Offer

(in INR)

Sr No.	Product Description	Total Payable Amount
1	Complete EPC Price for Design, Engineering, Supply and Installation and Testing of Solar Power Generating System – 3.60 KW	2,06,612
2	GST Tax 5% On Material Cost (70% Of Total Cost)	7,231
3	GST Tax 18% on Inst., Com. & CMC (30% of Total Cost)	11,157
	Total Project Cost	**2,25,000**
National Portal Subsidy Details		
4	CFA Subsidy 3.60 kW on	- 78,000
5	-	-
	Total Subsidy	**78,000**
Additional Cost Details		
6	Elevated Structure Cost	-
7	Cable Cost	-
8	Inverter Charge	-
9	Penal Charge	-
10	Discom Meter Connectivity Charges (Approx)	-
11	Registration Fee	-
12	Stamp Duty	
13	Earthing	-
	Total Additional Cost	**-**
	Total System Cost After Subsidy	**1,47,000**
	Total Amount Payable	**2,25,000**

In Words: Rupee Two Lakh Twenty-Five Thousand Only

Technical Specifications & BOM

Sr no	Item Description	Unit	Qty.	Size	Make
1	Solar Topcon-Bifacial Modules	Nos	6	600 Watt	SUNNORA (30 Years Warranty) DCR
2	String Type Grid Tied Inverter	Nos	1	3.6 KW	POLYCAB (8 Years)
3	Module Mounting Structure - Hot Dip Galvanize Iron - 80-Micron Zinc Coating - SS304 Bolt	Set		As Per Design 60X40–40X40 60X40 - LEG 60X40 – RAFTER 40X40 - PERLIN	
4	AC Distribution Box	Nos	As per Design		L&T
5	DC Distribution Box	Nos	As per Design		L&T
6	AC Cables	Mtr	As per Design		Polycab 4.0 SQMM
7	DC Cables	Mtr	As per Design		Polycab 4.0 SQMM
8	LA Cables	Mtr	As per Design		Johnson / Polycab / Canbari
9	Earthing Kit	Nos	As per Design		Reputed Make
10	Lighting Arrester System	Nos	As per Design		Reputed Make
11	BOS	Nos	As per Design		Reputed Make

Note: - If any Condition, any Material is not available which is mentioned above for Supply, that Material will replace with Comparable Reputed Brand for Completion of Project without Prior Notice.

Terms And Conditions

Scope Of Work Of Unique Solar Energy:-

- Design, Engineering, Supply, Installation and Commissioning of Grid connected Solar Power Plant. (Includes Layout, BOQ & Electrical SLD)
- Liaisoning work with GEDA, PGVCL & Other Government Department.
- Erection of Earthing & Lightning Protection system.
- Coordinating with Contractors (Electrical, Civil, etc.) for various Installations.
- Configuration of Remote Monitoring System for Solar Plant Performance monitoring.
- Execution of Project with all standard safety measures.

Operational Commitments:-

- Operation and maintenance of Plant in Customer Scope. (Cleaning of the System)

Scope of Work by Client:-

- Roof Area required @10 Sq.Mtr per kWp for the Solar Power Plant.
- Abide by all the terms and conditions of Work Order.
- Providing necessary documents for submission of net-metering application and Liaoning Approvals from local Govt. (as & when required)
- Provide all the necessary drawings & documents before material supply.
- Any other Equipment/Services not explicitly mentioned in our scope of supply.
- DISCOM Registration Charge & Net Meter Charge Inclusive as Per GUVNL Guidelines, DISCOM System Straightening Charge Exclusive as Per Feasibility Survey.

Validity:-

- Our offer will remain open for your acceptance for 7 days from the date of this offer.
- Any Changes In Module Price Before Finalizing The Order Is Added To Quotation.

Terms of Payment:-

- 3000 Rs. Per KW Payment As Advance With Purchase Order.
- Pending Amount Before Material Dispatch.

Delivery:-

- Normally 90 Days from the Date of PO but subject to all legal procedure and sanctions from concerned Govt. departments.

Insurance:-

- On Commissioning Of The Plant, The Plant Shall Be Handed Over To The Client And The Client Shall Be Responsible To Arrange For Suitable Asset Insurance Of The PV System.

Guarantee & Warranty of the Plant:-

- Module warranty: Limited extended performance warranty for 25 years including 10 Years against any manufacturing defects. Module is guaranteed for output power of 90% for first 10 years & 80% for subsequent 15 years.
- Inverter warranty: Inverters are warranted for 8 years.
- Breakage of panels and/or any other equipment will not be covered under warranty.
- Other equipment's warranty is up to Five year from the installation of the projects.

Warranty Exclusion:-

- Product that has been damaged, subjected to misuse, abnormal service or handling, or not maintained as per product manual.
- Any unauthorized tampering on the electrical parts and connections, any damage to the electrical.
- Any abnormal environmental conditions such as acid rain, earthquake, heavy wind, rains etc.

Purchase Order And Payment Terms In Name Of:-

Unique Solar Energy

Tithava, Wankaner, Morbi, Gujarat

GSTIN NO.	XXXXXXXXXXXX
Bank Name	_____
Account Number	_____
RTGS / NEFT IFSC Code	_____
Bank Branch	_____

Acceptance Of Offer:-

Customer:-	Signature:-
Name:-	Title:-
Date:-	Address:-

This is system generated quotation not require sign. And stamp.